

07-11-00

A

07/10/00

1c846 U.S. PTO

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 429-11

First Inventor or Application Identifier Hsu, James T.

Title Heat Transfer Fluid Compositions

Express Mail Label No. EL494738116US

APPLICATION ELEMENTS
See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)

2. ☒ Specification [Total Pages 34]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]

4. Oath or Declaration [Total Pages 2]
a. ☒ Newly executed (original or copy)
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
i. ☒ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)

6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))

8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)

9. ☐ English Translation Document (if applicable)

10. ☐ Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]

11. ☐ Preliminary Amendment

12. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)

13. ☐ Small Entity Statement(s) [Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)]

14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

15. ☒ Other: Cert of Express Mail Claim of Priority

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No: 08,674,348
Prior application information: Examiner C. Skane Group / Art Unit: 1751
For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name Sanford J. Piltch, Esq.

Address The Atrium - Suite 204
2895 Hamilton Blvd

City Allentown State PA Zip Code 18104

Country USA Telephone 610.433.6266 Fax 610.820.9566

Name (Print/Type) Sanford J. Piltch, Esq. Registration No. (Attorney/Agent) 29,997

Signature [Signature] Date 07/10/2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE: U.S. Patent Application of :
James T. Hsu, et al. :
SERIAL NO.: :
FILED: Herewith :
FOR HEAT TRANSFER FLUID COMPOSITIONS :
FOR LOW TEMPERATURE APPLICATIONS :

**CERTIFICATE OF MAILING BY "EXPRESS MAIL"
PURSUANT TO RULE 10 (37 C.F.R. §1.10)**

I hereby certify that the below listed paper(s) [including any required fees] is/are being deposited with the United States Postal Service as Express Mail [Post Office to Addressee Service], postage prepaid, and addressed to: **Box PATENT APPLICATION, Commissioner of Patents, Washington, D.C. 20231**, on the date indicated below pursuant to Rule 10 (37 C.F.R. §1.10).


EXPRESS MAIL LABEL NO.: **EL494738116US**

Patent Application [34 Pages]
Drawing Sheets [5]
Declaration and Power of Attorney
Small Entity Statements [2]
Return Receipt Postcard

Utility Patent Application Transmittal
Fee Transmittal [2]
Claim of Priority
Statement Requesting Deletion of Inventor

DATE: **July 10, 2000**

BY:

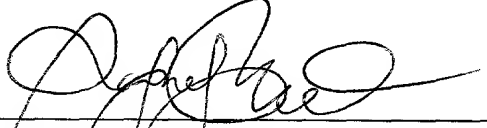
Sanford J. Piltch, Esq.
Reg. No. 29,997
The Atrium - Suite 204
2895 Hamilton Boulevard
Allentown, PA 18104

TELEPHONE: 610-433-6266
FACSIMILE: 610-820-9566

APPLICANT OR PATENTEE:

James T. Hsu, et al.

SERIAL OR PATENT NO.:

ATTORNEY'S DOCKET NO.:

429-11

FILED OR ISSUED:

[Herewith]

FOR

HEAT TRANSFER FLUID COMPOSITIONS
FOR LOW TEMPERATURE APPLICATIONS

**VERIFIED STATEMENT (DECLARATION)
CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(F) AND 1.27(B)) - INDEPENDENT INVENTOR**

Commissioner for Patents
Washington D.C. 20231

Sir:

I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the U.S. Patent and Trademark Office with regard to the invention, entitled: **Heat Transfer Fluid Compositions for Low Temperature Applications** by inventor(s): **James T. Hsu, Satish Mohapatra, Daniel J. Loikits** described in



the specification filed herewith.



application Serial No. _____, filed _____.



Patent No. _____, issued _____.

I also hereby declare that rights under contract or law, by assignment, grant, license or other conveyance, have / ~~have not~~ been conveyed by the individual inventor identified above and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which could not qualify as a small business concern under 37 CFR 1.9(d), or a non-profit organization under 37 CFR 1.9(e).

Each entity to which I have assigned, granted, licensed or otherwise conveyed, or each entity to which I am under an obligation under contract or law to assign, grant, license or otherwise convey, any rights in the invention is identified below



No such person, small business concern, or non-profit organization exists.

NAME OF ENTITY: **Advanced Fluid Technologies, Inc.**
ADDRESS: **5250 W. Coplay Road, Whitehall, PA 18052**

- ☐ Individual
☒ Small Business Concern
☐ Non-profit Organization

NAME OF ENTITY:
ADDRESS:

- ☐ Individual
☐ Small Business Concern
☐ Non-profit Organization

Separate verified statements are required from each individual, small business concern or non-profit organization having rights to the invention averring to their status as small entities (37 CFR 1.27).

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or maintenance fee due after the date on which the status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing therefrom, or any patent to which this verified statement is directed

INDEPENDENT INVENTOR:

James T. Hsu

ADDRESS OF PERSON SIGNING:

**3101 Kenwick Circle
Bethlehem, PA 18018**

SIGNATURE:

James T. Hsu

DATE:

July 10, 2000

Satish Mohapatra

422 Pierce Street, 2nd Flr.
Bethlehem, PA 18015

S. Mohapatra

July 10, 2000

Daniel J. Loikits

76 Oak Lane
Northampton, PA 18067

Northamp

July 10, 2000

429-11

APPLICANT OR PATENTEE:

Advanced Fluid Technologies, Inc.

SERIAL OR PATENT NO.:

ATTORNEY'S DOCKET NO.:

429-11

FILED OR ISSUED:

[Herewith]

FOR:

**HEAT TRANSFER FLUID COMPOSITIONS
FOR LOW TEMPERATURE APPLICATIONS**

**VERIFIED STATEMENT (DECLARATION)
CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(C-F) AND 1.27(C)) - SMALL BUSINESS CONCERN**

Commissioner of Patents and Trademarks
Washington D.C. 20231

Sir:

I hereby declare that I am

☐

the owner of the small business concern identified below,

☒

an official of the small business concern empowered to act on behalf of the said
concern identified below;

NAME OF CONCERN:

Advanced Fluid Technologies, Inc.

ADDRESS OF CONCERN:

**5250 W. Coplay Road
Whitehall, PA 18052**

and that said concern qualifies as a small business concern as defined in 37 CFR 1.9(d) for purposes of paying reduced fees to the U.S. Patent and Trademark Office with regard to the invention, entitled: **Heat Transfer Fluid Compositions for Low Temperature Applications** by inventor(s): **James T. Hsu, Satish Mohapatra, Daniel J. Loikits** described in

☒

the specification filed herewith.

☐

application serial no. _____, filed _____.

☐

patent no _____, issued _____.

I also hereby declare that rights under contract or law, by assignment, grant, license or other conveyance, have been conveyed to and remain with the small business concern identified above and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which could not qualify as a small business concern under 37 CFR 1.9(d), or a non-profit organization under 37 CFR 1.9(e).

Each entity to which the small business concern has assigned, granted, licensed or otherwise conveyed, or each entity to which the small business concern is under an obligation under contract or law to assign, grant, license or otherwise convey, any rights in the invention is identified below:

☒ No such person, small business concern, or non-profit organization exists.

NAME OF ENTITY:

ADDRESS:

- ☐ Individual
☐ Small Business Concern
☐ Non-profit Organization

NAME OF ENTITY

ADDRESS:

- ☐ Individual
☐ Small Business Concern
☐ Non-profit Organization

Separate verified statements are required from each individual, small business concern or non-profit organization having rights to the invention averring to their status as a small entity. (37 CFR 1.27).

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or maintenance fee due after the date on which the status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing therefrom, or any patent to which this verified statement is directed.

REPRESENTATIVE OF SMALL BUSINESS CONCERN: **Daniel J. Loikits**
TITLE OF PERSON SIGNING: **President**

NAME OF SMALL BUSINESS CONCERN: **Advanced Fluid Technologies, Inc.**
ADDRESS OF SMALL BUSINESS CONCERN: **5250 W. Coplay Road**
Whitehall, PA 18052

SIGNATURE: 

DATE **July 10, 2000**

HEAT TRANSFER FLUID COMPOSITIONS FOR LOW TEMPERATURE APPLICATIONS

FIELD OF THE INVENTION

The invention relates to the field of heat transfer processes. Specifically, the invention concerns low temperature heat transfer liquids suitable for use in heat transfer processes for the transfer of thermal energy at temperatures significantly below 0°F by means of a specially formulated low temperature heat transfer fluid composition. More specifically, the invention relates to heat transfer fluid compositions comprising blends containing a terpene component, comprising at least one terpene, and an alkylbenzene component, comprising at least one alkylbenzene. A later description of other low temperature heat transfer fluid compositions containing a terpene component, comprising at least one terpene, and a low viscosity silicone fluid will follow.

BACKGROUND OF THE INVENTION

There are many conventional heat transfer processes which act to transfer thermal energy to or from an object through physical contact with a heat transfer liquid which is either at a temperature hotter or colder than the object. A number of organic solvents have been used as such heat transfer liquids, for example, Dowtherm for high temperature heat transfer processes and low molecular weight alcohols, ketones and halogenated hydrocarbons for low temperature heat transfer processes.

Low temperature heat transfer processes continue to have difficulties caused by the volatility, toxicity, flammability, foaming or low temperature viscosity changes of the conventional

low temperature organic heat transfer liquids. Such conventional low temperature heat transfer liquids exhibit considerable viscosity change or freezing and foaming as their temperature is reduced. Furthermore, the freezing and boiling points of these heat transfer liquids necessarily restrict the operational temperature range of the heat transfer processes in which they are used.

Heat transfer liquids which might otherwise be useful may exhibit too high a freezing point or too low a boiling point, or both, to be efficiently employed in low temperature heat transfer processes. Specifically, the freezing or gelation of a low temperature heat transfer liquid will likely lead to a significant reduction in the efficiency of the thermal energy transfer. This reduction in efficiency will result from significant viscosity increases as well as clogging of transfer lines or other parts of the heat transfer apparatus which will act to interrupt or impede the circulation of the heat transfer liquid within the heat transfer process equipment

Also, some conventional low temperature heat transfer liquids such as acetone, absorb moisture present in their surroundings. Thus, heat transfer processes employing such fluids may be adversely affected by a rise in the freezing point temperature due to the absorption of moisture. Accordingly, the absorbed moisture (water) may constitute a disadvantage for low temperature heat transfer processes.

One class of heat transfer liquids known for being beneficial for lower temperature heat transfer processes (between 0°F and -142°F) are certain chemical compounds of the class of monocyclic terpenes. U.S Patent 3,597,355 (Hsu) describes the use of monocyclic terpenes as a class, and d-limonene in particular, as being useful for low temperature applications employing heat transfer liquids. The class of monocyclic terpenes is described as consisting of limonene, dipentene, terpinolene, α , β and γ terpinene, among others. The Hsu patent describes d-limonene as particularly preferred because of its characteristic properties. However, the Hsu patent does not describe the benefits of combining a terpene with an

alkylbenzene to produce the composite heat transfer fluid compositions of the invention, which exhibit improved low temperature operating characteristics.

Monocyclic terpenes are chemical compounds conventionally used as solvents, and also for a variety of other purposes such as the flavoring of foodstuffs. Monocyclic terpenes are described in the Hsu patent as being particularly useful in heat transfer processes which employ a heat transfer liquid as a means by which the heat is transferred, but only with an example using d-limonene. Such a heat transfer process might involve the circulation, by means of a pump or convection, in a conduit system in heat exchange contact with an apparatus from which heat is to be removed. The heat transfer liquid circulated is maintained at a temperature lower than that of the apparatus to be cooled by a suitable cooling mechanism.

The Hsu patent describes monocyclic terpenes as exhibiting relatively little viscosity change over the entire liquid phase temperature range, and thus, can advantageously retain excellent fluidity even at low temperatures which are slightly above their respective freezing points. Additionally, monocyclic terpenes have low surface tensions and display excellent wetting of metallic and non-metallic surfaces, properties which enhance heat transfer efficiency and minimize ice formation on such surfaces.

The specific teaching of the Hsu patent is the use of single monocyclic terpenes for use as heat transfer liquids. Since the grant of the Hsu patent, the cost of orange oil and commercially available limonene (d- or l-) has increased significantly. Furthermore, according to the Hsu patent, naturally occurring limonene is suitable for use as a heat exchange liquid without further refinement. The Hsu patent continues by stating that it is usually desirable to subject naturally occurring limonene to further distillation to provide relatively pure d-limonene for use as a heat exchange liquid. Relatively pure d-limonene, however, exhibits a reduction in heat exchange efficiency at temperatures below -120°F. At such temperatures the viscosity of

relatively pure d-limonene increases significantly. At temperatures below -140°F, relatively pure d-limonene begins to gel. Such viscosity increase and gelation effectively limits the use of relatively pure d-limonene to heat transfer processes that operate at temperatures above -120°F.

What is needed are heat transfer fluid compositions with improved low temperature operating characteristics. Specifically, what is needed are heat transfer fluid compositions which remain in the liquid phase at temperatures from about 0°F to below -120°F, preferably from about 0°F to about -175°F for the terpene/alkylbenzene compositions and from about 0°F to about -200°F for the terpene/silicone compositions..

SUMMARY OF THE INVENTION

It has been surprisingly found that heat transfer fluid compositions comprising (a) a terpene component, comprising at least one terpene; and (b) an alkylbenzene component, comprising at least one alkylbenzene; are suitable for use as heat exchange liquids for low temperature applications. It has also been unexpectedly determined, with just as much surprise, that heat transfer fluid compositions comprising (a) a terpene component, comprising at least one terpene; and (b) a low viscosity silicone component are also suitable for use as heat exchange fluids for low temperature applications.

It is an object of the invention to provide heat transfer fluid compositions which exhibit improved performance characteristics under low temperature conditions, namely compositions which have a wide operational temperature range in which they remain in the liquid phase and in which they do not exhibit a significant increase in viscosity or gelation. Such significant viscosity increases and gelation may cause a reduction in the efficiency of the heat transfer

system in which the fluids are employed by impeding the circulation of the fluid within the heat transfer system apparatus.

It is another object of the invention to provide heat transfer fluid compositions comprising (a) a terpene component, comprising at least one terpene; and, (b) an alkylbenzene component, comprising at least one alkylbenzene; wherein the components are provided in an effective amount such that the resultant composition remains in the liquid phase at temperatures in the range from about 0°F to below -120°F, preferably from about 0°F to about -175°F.

It is another object of the invention to provide heat transfer fluid compositions wherein the terpene component comprises at least one terpene selected from the group of terpenes listed in Table 2, and derivatives thereof, and wherein the resultant composition remains in the liquid phase at temperatures in the range from about 0°F to below -120°F, preferably from about 0°F to about -175°F.

It is another object of the invention to provide heat transfer fluid compositions wherein the terpene component comprises at least one terpene selected from the group of terpenes consisting of d-limonene, terpinolene, α -terpinene, γ -terpinene, myrcene, 3-carene, sabinene, α -pinene and camphene and wherein the resultant composition remains in the liquid phase at temperatures in the range from about 0°F to below -120°F, preferably from about 0°F to about -175°F.

It is another object of the invention to provide heat transfer fluid compositions wherein the terpene component comprises at least one terpene selected from the group of terpenes consisting essentially of d-limonene and terpinolene and wherein the resultant composition remains in the liquid phase at temperatures in the range from about 0°F to below -120°F, preferably from about 0°F to about -175°F.

It is another object of the invention to provide heat transfer fluid compositions wherein the alkylbenzene component comprises at least one alkylbenzene selected from the group of alkylbenzenes including cumene, diethyl benzene, methyl propyl benzene, propyl benzene and butyl benzene and wherein the resultant composition remains in the liquid phase at temperatures in the range from about 0°F to below -120°F, preferably from about 0°F to about -175°F.

It is still another object of the invention to provide heat transfer fluid compositions comprising (a) a terpene component, comprising at least one terpene; and (b) a low viscosity silicone component wherein the components are provided in an effective amount such that the resultant composition remains in the liquid phase at temperatures in the range from about 0°F to below -175°F, preferably from about 0°F to about -200°F

It is another object of the invention to provide a low temperature heat transfer system using a heat transfer liquid comprising (a) transferring thermal energy from the heat transfer liquid to a cooling fluid such that the heat transfer liquid is cooled to a temperature between about 0°F and about -175°F; (b) transferring thermal energy from an object to be cooled to the heat transfer liquid; and, (c) repeating (a) and (b) until said object is cooled to the desired temperature; wherein the heat transfer liquid consists of a heat transfer fluid composition comprising (a) a terpene component, comprising at least one terpene, and (b) an alkylbenzene component, comprising at least one alkylbenzene and wherein said components are provided in an effective amount such that the resultant composition remains in the liquid phase at temperatures in the range from about 0°F to about -175°F. Further, the heat transfer liquid may also consist of a heat transfer fluid composition comprising (a) a terpene component, comprising at least one terpene; and (b) a low viscosity silicone component wherein said components are

provided in an effective amount such that the resultant composition remains in the liquid phase at temperatures in the range from about 0°F to about -200°F

BRIEF DESCRIPTION OF THE DRAWINGS

For the purpose of illustrating the invention, forms are shown in the drawings which are presently preferred. It must be understood, however, that the invention is not limited to the precise arrangements and instrumentalities shown

FIG. 1 is a depiction of the experimental apparatus used to test the freezing and melting point temperature characteristics of the heat transfer fluid compositions of the invention;

FIG. 2 is a chart showing the experimental freezing and melting temperature versus time curve for pure (95.6% by weight) d-limonene;

FIG. 3 is a chart showing the experimental freezing/melting temperature versus time curve for pure (95.6% by weight) d-limonene in comparison with the experimental freezing/melting temperature versus time curve for a heat transfer fluid composition consisting of a mixture of d-limonene and cumene, wherein the composition consists of about 50% by volume of cumene in d-limonene;

FIG. 4 is a diagrammatic view of a heat transfer process system using a heat transfer fluid composition of the present invention.

FIG 5. is a chart showing the experimental freezing/melting temperature versus time curve for pure d-limonene in comparison with the experimental freezing/melting temperature versus time curve for a heat transfer fluid composition consisting of a mixture of d-limonene and silicone, wherein the composition consists of about 50% by volume of silicone and d-limonene.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The novel heat transfer fluid compositions of the invention exhibit low freezing point temperatures and a broad range of temperatures over which they retain the liquid phase. Both of these characteristics are very desirable for low temperature heat transfer fluids. Specifically, the heat transfer fluid compositions of the invention can be used in heat transfer process systems with operating temperatures on the heat transfer liquid side of between about 0°F and about -120°F, preferably between about 0°F and about -175°F, or to about -200°F, depending upon the fluid composition. Furthermore, the heat transfer fluid compositions of the invention allow for a wide range of operating conditions under which they will not vaporize or freeze.

The following detailed description represents the best presently contemplated mode of carrying out the invention. The description is not intended in a limiting sense, and it is made solely for the purpose of illustrating the general principles of the invention. The various features and advantages of the present invention may be more readily understood with reference to the following detailed description taken in conjunction with the accompanying drawings and claims.

The term "terpenes" traditionally applied to cyclic hydrocarbons having structures with empirical formula $C_{10}H_{16}$ which occur in the essential oils of plants. Knowledge of the chemistry of the terpene field has developed and compounds related both chemically and biogenetically to the $C_{10}H_{16}$ carbons have been identified. Some natural products have been synthesized and other synthetic compounds resemble known terpene structures. Consequently, the term "terpenes" may now be understood to include not only the numerous $C_{10}H_{16}$ hydrocarbons, but also their hydrogenated derivatives and other hydrocarbons possessing similar fundamental chemical structures. These hydrocarbons may be acyclic or cyclic, simple or complex, and of natural or synthetic origin. The cyclic terpene hydrocarbons may be classified as monocyclic,

bicyclic, or tricyclic. Many of their carbon skeletons have been shown to consist of multiples of the isoprene nucleus, C_5H_8 .

It is known that certain monocyclic terpenes, particularly d-limonene, may be used as heat transfer fluids. Note that in this disclosure the term d-limonene will be understood to refer to commercially available "d-limonene". Those skilled in the art will know that commercially available d-limonene is not 100% pure d-limonene. For example, d-limonene, commercially available as food grade d-limonene from Florida Chemical, was subjected to gas chromatograph analysis which resulted in the determination of the minor constituent components of the relatively pure d-limonene mixture as shown in Table 1.

TABLE 1

<u>Component Chemical Compound</u>	<u>% by weight in Commercial d-limonene</u>
d-limonene	95.6%
octanal	0.4%
sabinene	0.7%
α -pinene	0.6%
myrcene	2.7%

The various compounds recited in Table 1 may be classified as follows: d-limonene is a monocyclic terpene; 3-carene, sabinene and α -pinene are bicyclic terpenes; myrcene is an acyclic terpene; and octanal is a non-terpene compound.

Experiments were performed on a sample of food grade d-limonene obtained from Florida Chemical. The purpose of these experiments was to determine the freezing point temperature and melting point temperature of the d-limonene. These tests were performed using the apparatus depicted in FIG. 1. The test apparatus shown in FIG. 1 is called a cryostat. Most of the components of the apparatus were fabricated by Loikits Industrial Services. The

principal components of the apparatus are a cold finger or nitrogen evaporator coil (4) made of copper to which liquid nitrogen enters through the liquid nitrogen line (1) and exits through line (2). The cold finger (4) is submerged in a bath of liquid (6) whose freezing/melting characteristics are to be determined. Agitation of liquid (6) is provided by a mechanical stirrer (3) connected to a motor (5). Thermocouples (9) are located at different points to measure the temperatures of the liquid (6) as well as the cold finger (4). The glass dewar (10) is vacuum jacketed to provide insulation from the ambient surroundings.

The procedure used to determine the freezing/melting point characteristics of the food grade d-limonene follows:

1. measuring out about 600 ml of d-limonene;
2. optionally drying the d-limonene by passing it through a drrite column;
3. pouring the 600 ml of d-limonene into a clean dewar (10);
4. agitating the d-limonene with stirrer (3) rotating at a rate of about 2,400 rpm;
5. cooling the d-limonene by initiating the flow of liquid nitrogen to the cold finger (4) by opening control valve (7);
6. operating control valve (7) to regulate the flow of liquid nitrogen to the cold finger (4) such that the temperature difference between the d-limonene in the dewar and the cold finger does not exceed 30°F;
7. continuing cooling until the d-limonene freezes, or until the temperature minimum for the apparatus is reached (i.e., continued cooling does not result in a reduction in the d-limonene temperature; this minimum temperature has been observed to be about -175°F for the test apparatus used);

8. observing the temperature of the d-limonene when freezing occurs, if freezing occurs during the cooling phase;
9. stopping the flow of liquid nitrogen to the cold finger (4) to allow the d-limonene to warm through absorption of heat from the ambient surroundings;
10. observing the temperature of the d-limonene when freezing occurs, if freezing occurs during the warming phase; and,
11. optionally heating the d-limonene with heater (8) to speed melting during the experiment.

The following observations were made during the experiments performed on the d-limonene. The d-limonene formed a gel phase at temperatures below about -120°F. It was observed that sudden gelation occurred at or just below about -130°F. Upon repeating the experiment, the gelation point was confirmed to be approximately -130°F. Gelation of commercial d-limonene at the temperature noted would tend to cause a significant increase in the viscosity of the d-limonene at such temperatures. Using a temperature driving force of about 5°F (i.e., maintaining the temperature of the cooling element at a temperature about 5°F colder than the d-limonene) and providing gentle agitation, it was possible to supercool the d-limonene to a temperature below -160°F without freezing. After cooling the d-limonene in the test apparatus to about -160°F, the flow of liquid nitrogen to the evaporation coil (4) was stopped and the d-limonene was allowed to absorb heat from the surrounding environment at ambient temperature, 65°F. Upon warming the d-limonene underwent rapid freezing.

The results of the experiments performed on the d-limonene are provided in graphical form in FIG. 2. These experiments demonstrate that the d-limonene tested had a freezing point temperature of about -153°F and a melting point temperature of about -110°F.

Referring to FIG. 2, this chart graphically demonstrates the temperature reduction in degrees Fahrenheit against time for d-limonene. The initial liquid phase of the d-limonene tested is shown as Zone I in FIG. 2. In the initial liquid phase, the temperature of the d-limonene in the experimental bath was reduced with data being plotted in FIG. 2 beginning at a temperature of approximately -100°F. After approximately 19 minutes, the d-limonene was cooled to about -163°F, Point A. The flow of liquid nitrogen was then stopped and the d-limonene was allowed to warm by absorbing heat from the ambient surroundings. After about 4 minutes, the d-limonene increased in temperature to approximately -153°F, Point B. At this temperature amorphous solidification was observed. Accordingly, -153°F was determined to be the nominal freezing point temperature for the d-limonene.

The solid phase of the d-limonene tested is shown as Zone II in FIG. 2. The solid 20 phase began at approximately -153°F, Point 13. During the about one minute following Point B, significant solidification occurred resulting in the gelation of the d-limonene. The solidification of the d-limonene was accompanied by an increase in temperature. The gelation or solidification of the d-limonene ended at about one minute after its freezing point temperature was reached, or about 24 minutes into the experiment, Point C. The temperature of the d-limonene was approximately -113°F when freezing was complete. During the solid phase in Zone II between Points C and D, the d-limonene was warmed to approximately -110°F by the absorption of heat from the atmosphere surrounding the test apparatus. This solid phase existed for approximately seven to eight minutes. The d-limonene began to melt when its temperature reached about -110°F, Point D. After about four minutes, the melting was complete, Point E.

The second liquid phase of the d-limonene tested is shown as Zone III in FIG. 2. The second liquid phase began at about -110°F, Point E. Accordingly, the melting point temperature of the d-limonene was determined to be approximately -110°F. Thus, as a result of this

experimental analysis of the commercially available d-limonene, it was determined that d-limonene has a freezing point temperature of about -153°F and a melting point temperature of about -110°F . Note, however, that the freezing point temperature of commercially available d-limonene is not consistent, namely it varies depending upon what impurities are present and on the degree of agitation provided. Notwithstanding, the melting point temperature of the commercially available d-limonene was consistently about -110°F .

An identical test using the same test apparatus was performed on terpinolene to determine its freezing point and melting point temperatures. The terpinolene was determined to have a freezing point temperature of about -134°F and to have a melting point temperature of about -95°F .

Furthermore, the same test apparatus was used to determine the freezing point and melting point temperatures of two alkylbenzenes, namely cumene and diethyl benzene. The cumene tested was obtained from Aldrich Chemicals. The freezing point temperature and the melting point temperature of the cumene tested was determined to be the same temperature, namely about -145°F . The diethyl benzene tested was also obtained from Aldrich Chemicals and was actually a mixture of three isomers, namely 1,2-diethyl benzene; 1,3-diethyl benzene; and 1,4-diethyl benzene. The freezing point and the melting point temperatures of the diethyl benzene tested were determined to be the about -148°F and about -130°F , respectively.

It has been surprisingly found that alkylbenzenes can be mixed with terpenes to obtain heat transfer fluid compositions that exhibit characteristics which are superior to either component alone. Specifically, various mixtures of terpenes can be cooled to temperatures as low as -175°F without freezing. The viscosity of these mixtures, however, varies at the reduced temperatures. It has been discovered that mixtures of terpene and alkylbenzene produce distinctly different physical properties as compared to either terpenes or alkylbenzenes alone.

TABLE 2

ACYCLIC TERPENES

geraniolene
myrcene
dihydromyrcene
ocimene
allo-ocimene

MONOCYCLIC TERPENES

p-menthane	carvomenthene
menthene	dihydroterpinolene
dihydrodipentene	α -terpinene
γ -terpinene	α -phellandrene
pseudolimonene	limonene
d-limonene	1-limonene
d, l-limonene	isolimonene
terpinolene	isoterpinolene
β -phellandrene	β -terpinene
cyclogeraniolane	pyronane
α -cyclogeraniolene	β -cyclogeraniolene
γ -cyclogeraniolene	methyl- γ -cyclogeraniolene
α -pyronene	cyclodihydromyrcene
β -pyronene	γ -pyronene
1-ethyl-5,5-dimethyl-1,3-cyclohexadiene	
2-ethyl-6,6-dimethyl-1,3-cyclohexadiene	1(7)-p-menthene
2-p-menthene	2,5-p-menthadiene
2,4-p-menthadiene	3,8-p-menthadiene
1(7),4(8)-p-menthadiene	
1,2,3,5-tetramethyl-1,3-cyclohexadiene	1,1-dimethylcyclohexane
1,2,4,6-tetramethyl-1,3-cyclohexadiene	
1,6,6-trimethylcyclohexene	

TABLE 2, CONTINUED

BICYCLIC TERPENES

norsabinane	northujene
isopropylbicyclo[3.1.0]hex-2-ene	β -thujene
thujane	sabinene
α -thujene	norcarane
3,7-thujadiene	3-norcarene
2-norcarene	carane
2,4-norcaradiene	3-carene
2-carene	nonpinane
β -carene	apopinane
2-norpinene	orthodene
apopinene	homopinene
norpadiene	2-pinene
pinane	β -pinene
3-pinene	homoverbanene
verbenene	norcamphane
4-methylene-2-pinene	camphane
apocamphane	a-fenchene
α -fenchane	santane
santenane	camphenilane
norcamphene	isocamphane
fenchane	camphene
β -fenchane	2-norbornene
β -fenchene apobornylene	bornylene
2,7,7-trimethyl-2-norbornene	santene
camphenilene	isofenchene
isocamphodiene	1,2,3-trimethyl-2-norbornene
2,5,5 , -trimethyl-2-norbornene	

The derivatives of the terpenes listed in Table 2 consist of both monocyclic and bicyclic terpene derivatives. The monocyclic terpene derivatives which may be used in the heat transfer fluid compositions of the invention include the derivatives of the acyclic and monocyclic terpenes listed in Table 2. There are two basic categories of these derivatives. The first category includes monocyclic terpenes which may be readily formed from acyclic terpenes by ring closure and from bicyclic terpenes by ring fission. A monocyclic terpene contains a six-

carbon ring and may be considered a derivative of either cyclohexane or benzene with a common base carbon ring structure of $C_{10}H_{16}$. The various derivatives fall into a classification of either Type A or Type B. The Type A group of monocyclic terpenes may be considered derivatives from menthane (isopropylmethylcyclohexane) or from cymene (isopropylmethylbenzene), all of which may be considered propyl compounds based on the carbon ring structure. The Type B monocyclic terpenes may be considered derivatives of dimethylcyclohexane, for which there is no trivial name, and may be considered derivatives of methyl compounds based upon the carbon ring structure

The second category of derivative adds an atom, functional group or another molecule to the terpene compound. For example the terpene molecule may be oxygenated; hydrogenated; halogenated; nitrogenated; modified with silicon based compounds; or reacted to incorporate a functional group such as an hydroxy, ester, ketone, amine, amide, amino, carboxyl or the like.

The bicyclic terpene derivatives which may be used in the heat transfer fluid compositions of the invention include the bicyclic derivatives of the terpenes listed in Table 2. The various derivatives which may be classified as bicyclic terpenes fall into four categories, namely thujane (sabinane), carane, α -pinane and bornane (camphane), each category designating a different class of bicyclic structures. These bicyclic terpene structures, also consisting of the basic chemical unit $C_{10}H_{16}$, resemble the menthane Type A monocyclics and may be considered to be derivatives of propyl compounds with carbon ring structures containing a gem-dimethyl configuration with either an isopropyl group or a hexane or heptane group based upon the carbon ring structure. As above, this describes the first derivative type for the bicyclic terpene compounds. The second derivative type 15 described in connection with the monocyclic terpenes also describes the second derivative type for bicyclic terpenes. The detailed structure of these terpene hydrocarbons are described in "Nomenclature for Terpene

Hydrocarbons", Advances in Chemistry Series No 14 (American Chemical Society), 1955, which is incorporated herein by reference.

The alkylbenzene component of the heat transfer fluid compositions of the invention comprises at least one alkylbenzene. An alkylbenzene is defined as a benzene alkylated with a hydrocarbon. The at least one alkylbenzene may be selected from the group of alkylbenzenes comprising cumene, diethyl benzene, methyl propyl benzene, propyl benzene and butyl benzene.

The heat transfer fluid compositions of the invention may optionally contain various additives. For example, the fluid compositions of the invention may optionally contain at least one of an antioxidant, e.g. butylated hydroxy toluene (BHT) and vitamin F; and a stabilizing agent, e.g. hydroquinone.

The invention will now be illustrated by the following Examples, which are intended to be purely exemplary and not limiting. In each of the following examples the d-limonene used had an assay like that shown in Table 1, above, and is commercially available from Florida Chemicals as food grade d-limonene; the diethyl benzene used consisted of a mixture of isomers, namely 1,2-diethyl benzene, 1,3-diethyl benzene and 1,4-diethyl benzene, and is commercially available from Aldrich Chemicals; the cumene used had a purity of 98%, and is commercially available from Aldrich Chemicals; the terpinolene used had an assay like that shown in Table 3, and is commercially available from Glidco Organics in Florida.

TABLE 3

<u>Component</u> <u>Chemical Compound</u>	<u>% by weight in</u> <u>Commercial Terpinolene</u>
terpinolene	99%
linolool	<1%
γ -terpinene	<1%
octanol	<1%

The test apparatus and procedure presented above with regard to the analysis done to determine the freezing/melting point temperature characteristics of commercially available d-limonene were used to determine the freezing/melting point temperature characteristics of the heat transfer fluid compositions discussed in the following examples. In considering these examples, however, notice should be given to the limitations in the test apparatus used. Particularly, due to the limitations in the test apparatus the lowest temperature that could be obtained in the heat transfer fluid compositions tested was about -175°F. Many of the heat transfer fluid compositions tested have freezing point temperatures at least as low as -175°F. Due to the limitations of the test apparatus it could not be determined how far below -175°F the freezing point temperatures of these liquids are. Notwithstanding, it should be understood by one skilled in the art that the heat transfer fluid compositions of the invention may have, and in many instances do have, freezing point temperatures below -175°F.

EXAMPLE 1

Using the same testing apparatus and procedure as discussed above with regard to d-limonene, tests were performed to determine the freezing/melting point temperature characteristics of a heat transfer fluid composition comprising about 20% by volume diethyl

benzene and about 80% by volume terpinolene. The freezing point temperature for the diethyl benzene/terpinolene composition was determined to be about -157°F.

EXAMPLE 2

Using the same apparatus and procedure as in Example 1, a heat transfer fluid composition comprising about 50% by volume cumene in d-limonene was tested. The composition was cooled to about -175°F. The composition was then allowed to warm. No solidification or crystallization was observed during either the cooling or the warming cycles. The results of the test analysis of the freezing/melting point temperature characteristics of the heat transfer fluid composition comprising about 50% by volume cumene in d-limonene is compared with the freezing/melting characteristics of d-limonene in FIG. 3.

EXAMPLE 3

Using the same apparatus and procedures as in Example 1, a heat transfer fluid composition comprising about 75 % by volume cumene and about 25% by volume d-limonene was prepared and tested. The composition was cooled to about -175°F. The composition was then allowed to warm. No solidification or crystallization was observed during either the cooling or the warming cycles.

EXAMPLE 4

The test procedure of Example 2 was repeated several times using heat transfer fluid compositions having different volume percentages of cumene and d-limonene. The behavior of these various compositions was studied to determine the preferred volume percent mixture of cumene to d-limonene with regard to the solidification and viscosity characteristics of the

resultant heat transfer fluid composition. It was observed that heat transfer fluid compositions containing less than about 10% by volume cumene exhibited freezing during the heating cycle (i.e., the composition was cooled to about -175°F without freezing but upon heating, crystallization was observed at about -165°F). Likewise, compositions containing more than about 88 % by volume cumene exhibited freezing during the heating cycle when the temperature rose to about -153°F. However, heat transfer fluid compositions comprising a mixture of d-limonene and cumene with a cumene content between about 10% and about 88% by volume were not observed to exhibit any gelation, crystallization or other solidification upon cooling to about -175°F or upon the subsequent warming of the composition. Hence, heat transfer fluid compositions comprising d-limonene and cumene, wherein the cumene content is between about 10% and about 88% by volume, have been determined to retain the liquid phase under a range of temperatures from between about 0°F and approximately -175°F. Thus, heat transfer fluid compositions comprising a mixture of cumene and d-limonene in which the cumene content is from about 10% to about 88% by volume may be used in heat transfer process systems with operating temperatures on the heat transfer liquid side down to at least about -175°F.

Several additional experiments were performed using different blends of terpenes and alkylbenzenes, to demonstrate that the phenomena identified regarding heat transfer fluid compositions comprising mixtures of cumene and d-limonene are common to mixtures of terpenes and alkylbenzenes generally. Specifically, the test procedures used in the previous examples were performed on heat transfer fluid compositions based on mixtures of varying amounts of terpinolene as the terpene component and diethyl benzene as the alkylbenzene component. Test results for three specific terpinolene/diethyl benzene compositions are provided in the next three examples.

EXAMPLE 5

A heat transfer fluid composition comprising terpinolene and diethyl benzene with a diethyl benzene content of about 10% by volume was prepared and tested. The freezing point temperature of this composition was observed to be about -141°F.

EXAMPLE 6

A heat transfer fluid composition comprising terpinolene and diethyl benzene with a diethyl benzene content of about 40% by volume was prepared and tested. The freezing point temperature of this composition was observed to be about -170°F.

EXAMPLE 7

A heat transfer fluid composition comprising terpinolene and diethyl benzene with a diethyl benzene content of about 60% by volume was prepared and tested. The freezing point temperature of this composition could not be determined because of the limitations of the testing equipment used as discussed previously. However, the composition was cooled down to about -175°F without any solid formation during cooling or during the subsequent warming cycle. Accordingly, the freezing point temperature of this heat transfer fluid composition was determined to be below -175°F.

Several additional tests were performed to obtain the lower threshold concentration and upper threshold concentration of diethylbenzene in terpinolene. It was observed that heat transfer fluid compositions comprising terpinolene and diethyl benzene with a diethyl benzene content of less than about 50% by volume exhibited a freezing point temperature above about -175°F. Furthermore, heat transfer fluid compositions comprising terpinolene and diethyl

between about 20% and about 65 % by volume were not observed to exhibit any gelation, crystallization or other solidification upon cooling to about -175°F or upon subsequent warming. Hence, heat transfer fluid compositions comprising d-limonene and diethyl benzene in which the diethyl benzene content is between about 20% and about 65% by volume have been determined to remain in the liquid phase at temperatures between about 0°F and approximately -175°F. Thus, heat transfer fluid compositions comprising a mixture of d-limonene and diethyl benzene in which the diethyl benzene content is from about 20% to about 65% by volume may be used in heat transfer process systems with operating temperatures on the heat transfer liquid side down to at least about -175°F.

With reference to FIG. 5, the terpene/silicone heat transfer fluid compositions will now be described. Based upon earlier research concerning eutectic terpene mixtures and terpene/alkylbenzene mixtures it was determined that these mixtures, in liquid form, were usable as heat transfer fluids for low temperature applications. But these mixtures were limited to certain minimum temperature levels; -165°F for the eutectic terpene mixtures and -175°F for the terpene/alkylbenzene mixtures. It should be recalled that neither of the mixtures, in their liquid state or phase could be cooled down below -180°F because of an significant increase in viscosity of these mixtures at such low temperature. It was observed that the viscosity of terpene and alkylbenzene increased exponentially with the lowering of temperature. However, a liquid mixture which could be cooled down to -200°F with liquid nitrogen without freezing or gelling was still needed.

Thus, the development of still another environmentally friendly heat transfer fluid for lower temperatures, using terpene mixtures, was undertaken. It was experimentally determined that a eutectic mixture of a low viscosity silicone (poly(dimethylsiloxane)) fluid and a terpene

Variable	Mean	Standard deviation	Minimum	Maximum
Age	34.5	10.5	20	55
Gender	0.5	0.5	0	1
Marital status	0.5	0.5	0	1
Education	12.5	1.5	10	15
Income	15.5	5.5	10	25
Health status	0.5	0.5	0	1
Smoking status	0.5	0.5	0	1
Alcohol consumption	0.5	0.5	0	1
Exercise frequency	0.5	0.5	0	1
Stress level	0.5	0.5	0	1
Sleep quality	0.5	0.5	0	1
Work satisfaction	0.5	0.5	0	1
Life satisfaction	0.5	0.5	0	1
Depression score	0.5	0.5	0	1
Anxiety score	0.5	0.5	0	1
Quality of life score	0.5	0.5	0	1
Healthcare utilization	0.5	0.5	0	1
Health insurance status	0.5	0.5	0	1
Healthcare access	0.5	0.5	0	1
Healthcare cost	0.5	0.5	0	1
Healthcare quality	0.5	0.5	0	1
Healthcare satisfaction	0.5	0.5	0	1
Healthcare utilization (continued)	0.5	0.5	0	1
Health insurance status (continued)	0.5	0.5	0	1
Healthcare access (continued)	0.5	0.5	0	1
Healthcare cost (continued)	0.5	0.5	0	1
Healthcare quality (continued)	0.5	0.5	0	1
Healthcare satisfaction (continued)	0.5	0.5	0	1

EXAMPLE 9

EXAMPLE 10

429-11

EXAMPLE 11

It was observed that 100% poly(dimethylsiloxane) [silicone] having a viscosity of 10.0 cSt and a density of 0.93 at room temperature froze at -103°F and melted around -90°F.

EXAMPLE 12

It was observed that a heat transfer fluid composition comprising 50% d-limonene and 50% silicone (1.6 cSt) by volume achieved a maximum low temperature of -222°F by controlled liquid nitrogen flow through the cooling coil. No freezing or gelling was observed during the cooling or the warming phase. See FIG 5.

In FIG 5 the freezing/melting curves of pure d-limonene (96.5%) and a 50% d-limonene and 50% silicone (1.6 cSt) mixture are compared over a 1.5 hours. The pure d-limonene freezes at approximately -148°F, as expected. The 50/50 mixture of d-limonene and silicone continues to be cooled down to -222°F before being allowed to warm. There was no evidence of freezing or gelling detected upon view of the cooling vessel. Other concentrations of mixtures of d-limonene and silicone (1.6 cSt) were tried with the following results.

EXAMPLE 13

It was observed that a heat transfer fluid composition comprising 10% d-limonene and 90% silicone (1.6 cSt) by volume remained in a liquid phase and did not freeze when cooled down to -203°F. Although it would have been possible, no attempt was made to continue to cool the liquid below the stated temperature. No freezing or gelling was observed during the cooling or warming phases.

EXAMPLE 14

A heat transfer fluid composition comprising 90% d-limonene and 10% silicone (1.6 cSt) was cooled to -182°F. It was observed that the liquid became very viscous, however, no freezing or gelling occurred during the cooling or warming phases.

EXAMPLE 15

A heat transfer fluid composition comprising 50% d-limonene and 50% silicone (5.0 cSt) was cooled to -175°F. It was observed that the liquid was very viscous, but not frozen at that temperature.

EXAMPLE 16

A heat transfer fluid composition comprising 50% d-limonene and 50% silicone (10.0 cSt) was observed to freeze between -150°F and -161°F. The melting point of this fluid was observed to be approximately -112°F.

It is apparent from the foregoing Examples that a low viscosity silicone fluid, i.e. less than 10.0 cSt, can be added to a terpene fluid to lower the freezing point of the mixture. The testing of the various experimental heat transfer fluids proved that the lower the viscosity of the silicone fluid, the lower the temperature to which the mixture can be cooled without freezing or gelling. With a lower fluid viscosity, the heat transfer efficiency from the cooling fluid remains constant rather than being reduced as viscosity increases.

Another aspect of the invention resides in the industrial application of the heat transfer fluid compositions of the invention in heat transfer process systems. In order to illustrate the industrial utility of this invention reference should be made to FIG. 4. FIG. 4 depicts a closed

loop cooling system (12) comprised of a pump (14), a jacketed vessel (16) holding the object to be cooled (18), a heat exchanger or evaporator (20), and a coolant expansion container (22). Heat transfer liquid (10) comprises a heat transfer fluid composition comprising (a) a terpene component, comprising at least one terpene; and (b) an alkylbenzene component, comprising at least one alkylbenzene wherein the said components are provided in an effective amount such that the resultant composition remains in the liquid phase at temperatures in the range from about 0°F to below about -120°F, preferably from about 0°F to about -175°F. The circulation pump (14) draws the liquid (10) from the expansion or storage container (22) and impels the heat transfer liquid (10) through the jacket of the coolant reactor vessel (16) containing the object to be cooled (18). The heat transfer liquid (10) passes through the reactor jacket causing the reduction in temperature of the object material (18) and passes to the heat exchanger (20). The heat exchanger (20) removes the absorbed heat transferred from the object to be cooled (18) in the cooler or chiller reactor (20) by means of heat extraction or cooling by subjecting the heat transfer liquid (10) to a cryogenic fluid (24) such as liquid nitrogen and liquid carbon dioxide or an ultra low temperature refrigerant used in a mechanical refrigeration system, i.e., R-13, R-14, R-23, R-503 and R-508. The cooled heat transfer liquid (10) then returns to the storage/expansion container (22) for recirculation and reuse in the cooling system.

A temperature control device is used to modulate the flow of the cryogenic fluid or refrigerant (24) to maintain the temperature of the recirculating heat transfer liquid (10) at a temperature below about 0°F, preferably below about -120°F, most preferably of about -175°F. The recirculated heat transfer liquid (10) is again pumped to the reactor jacket (16) where it absorbs thermal energy from the object to be cooled (18) in the reactor (16). This causes the heat transfer liquid (10) to increase in temperature. The process is repeated for as long as is necessary until the object to be cooled is cooled to the desired temperature.

The utility of the heat transfer fluid compositions of the invention lie in making available heat transfer liquids with superior physical properties and performance characteristics over currently available heat transfer liquids. Unlike existing heat transfer liquids, the heat transfer fluid compositions of the invention are non-toxic, non-hazardous, and biodegradable. The heat transfer fluid compositions of the invention provide for lower operating temperatures than can be achieved with presently available commercially viable heat transfer liquids. The heat transfer fluid compositions of the invention are of immense value to industries which require very low temperatures for process control, condensation, freeze drying, environmental conditioning, and cold storage. The heat transfer fluid compositions of the invention provide a solution to these needs with safe, economical, and environmentally friendly chemical components

The present invention may be embodied in other specific forms without departing from the spirit or essential attributes thereof. Accordingly, the described embodiments are to be considered in all respects as being illustrative and not restrictive, with the scope of the invention being indicated by the appended claims, rather than the foregoing detailed description, as indicating the scope of the invention as well as all modifications which may fall within a range of equivalency which are also intended to be embraced therein.

We claim:

1. A heat transfer fluid composition consisting essentially of: (a) 10% to 90% by volume of at least one terpene component; and (b) 90% to 10% by volume of at least one silicone component, in complementary proportional percentage amounts to retain the composition in its liquid phase at any temperature in the entire range from about 0°F to about -200°F.

2. The heat transfer fluid composition of Claim 1, wherein the at least one terpene is selected from the group consisting of acyclic terpenes, monocyclic terpenes and bicyclic terpenes.

3. The heat transfer fluid composition of Claim 2, wherein the acyclic terpenes are composed of geraniolene; myrcene; dihydromyrcene; ocimene and allo-ocimene.

4. The heat transfer fluid composition of Claim 2, wherein the monocyclic terpenes are composed of *p*-menthane; carvomethene; methene, dihydroterpinolene; dihydrodipentene; α -terpinene; γ -terpinene; α -phellandrene; pseudolimonene; limonene; d-limonene; 1-limonene; d,1-limonene; isolimonene; terpinolene; isoterpinolene; β -phellandrene; β -terpinene; cyclogeraniolane; pyronane; α -cyclogeraniolene; β -cyclogeraniolene; γ -cyclogeraniolene, methyl- γ -pyronene; 1-ethyl-5,5-dimethyl-1,3-cyclohexadiene; 2-ethyl-6,6-dimethyl-1,3-cyclohexadiene; 2-*p*-menthene; 1(7)-*p*-methadiene; 3,8-*p*-menthene; 2,4-*p*-menthadiene; 2,5-*p*-menthadiene; 1(7),4(8)-*p*-methadiene; 3,8-*p*-menthadiene; 1,2,3,5-tetramethyl-1-3-cyclohexadiene; 1,2,4,6-tetramethyl-1,3-cyclohexadiene, 1,6,6-trimethylcyclohexene and 1,1-dimethylcyclohexane.

5. The heat transfer fluid composition of Claim 2, wherein the bicyclic terpenes are composed of norsabinane; northujene; 5-isopropylbicyclo[3.1.0]hex-2-ene; thujane; β -thujene; α -thujene; sabinene; 3,7-thujadiene; norcarane; 2-norcarene; 3-norcarene; 2-4-norcaradiene;

carane; 2-carene; 3-carene; β -carene; nonpinane, 2-norpinene; apopinane; apopinene; orthodene; norpadiene; homopinene; pinane; 2-pinene; 3-pinene; β -pinene; verbenene; homoverbanene; 4-methylene-2-pinene; norcamphane; apocamphane; campane, α -fenchane; α -fenchene; santenane; santane; norcamphene; camphenilane; fenchane; isocamphane; β -fenchane; camphene; β -fenchane; 2-norbornene; apobornylene; bornylene; 2,7,7-trimethyl-2-norbornene; santene; 1,2,3-trimethyl-2-norbornene; isocamphodiene; camphenilene; isofenchene and 2,5,5-trimethyl-2-norbornene.

6. The heat transfer fluid composition of Claim 1, wherein the at least one terpene is selected from the group consisting of d-limonene, terpinolene, α -terpinene, γ -terpinene, myrcene, 3-carene, sabinene, α -pinene and camphene

7. The heat transfer fluid composition of Claim 1, wherein the at least one silicone is selected from the group consisting of silicones having viscosities less than 10.0 cSt

8. The heat transfer fluid composition of Claim 1, wherein the terpene component consists essentially of d-limonene and the silicone component consists essentially of a silicone having a viscosity of 1.6 cSt.

9. The heat transfer fluid composition of Claim 1, wherein the composition further consists of at least one antioxidant and a stabilizing agent

10. A low temperature heat transfer process using a heat transfer fluid composition comprising the steps of:

a. transferring thermal energy from the heat transfer fluid composition to a cooling fluid such that the heat transfer fluid composition is cooled to a temperature between about 0° and about -200°F;

b. transferring thermal energy from an object to be cooled to the heat transfer fluid composition; and,

c. repeating (a) and (b) until said object is cooled to the desired temperature;

wherein said heat transfer fluid composition consisting essentially of: (a) 10% to 90% by volume of at least one terpene component; and (b) 90% to 10% by volume of at least one silicone component; in complementary proportional percentage amounts to retain the composition in its liquid phase at any temperature in the entire range from about 0°F to about -200°F.

11. The process of Claim 10, wherein the thermal energy is transferred from the heat transfer fluid composition to at least one cryogenic fluid or a refrigerant.

12. The process of Claim 10, wherein the process is operated under conditions such that the temperature of the heat transfer composition ranges from about 0°F to between about -150°F and about -200°F.

13. The process of Claim 10, wherein the at least one terpene is selected from the group consisting of acyclic terpenes, monocyclic terpenes and bicyclic terpenes.

14. The process of Claim 13, wherein the acyclic terpenes are composed of geraniolene, myrcene; dihydromyrcene; ocimene and allo-ocimene.

15. The process of Claim 13, wherein the monocyclic terpenes are composed of ρ -menthane; carvomethene; methene, dihydroterpinolene; dihydrodipentene; α -terpinene; γ -terpinene; α -phellandrene; pseudolimonene; limonene; d-limonene; 1-limonene; d,1-limonene; isolimonene; terpinolene; isoterpinolene; β -phellandrene; β -terpinene; cyclogeraniolane; pyronane; α -cyclogeraniolene; β -cyclogeraniolene; γ -cyclogeraniolene; methyl- γ -pyronene; 1-ethyl-5,5-dimethyl-1,3-cyclohexadiene; 2-ethyl-6,6-dimethyl-1,3-cyclohexadiene; 2- ρ -menthene; 1(7)- ρ -methadiene; 3,8- ρ -menthene; 2,4- ρ -menthadiene; 2,5- ρ -menthadiene; 1(7),4(8)- ρ -methadiene, 3,8- ρ -menthadiene, 1,2,3,5-tetramethyl-1-3-cyclohexadiene;

1,2,4,6-tetramethyl-1,3-cyclohexadiene; 1,6,6-trimethylcyclohexene and
1,1-dimethylcyclohexane

16. The process of Claim 13, wherein the bicyclic terpenes are composed of
norsabinane; northujene; 5-isopropylbicyclo[3.1.0]hex-2-ene, thujane; β -thujene; α -thujene;
sabinene; 3,7-thujadiene; norcarane; 2-norcarene; 3-norcarene; 2-4-norcaradiene; carane; 2-
carene; 3-carene; β -carene; nonpinane; 2-norpinene; apopinane; apopinene; orthodene;
norpadiene; homopinene; pinane; 2-pinene; 3-pinene; β -pinene, verbenene, homoverbanene; 4-
methylene-2-pinene; norcamphane; apocamphane; campane; α -fenchane; α -fenchene;
santenane; santane; norcamphene; camphenilane, fenchane; isocamphane; β -fenchane;
camphene; β -fenchane; 2-norbornene; apobornylene; bornylene, 2,7,7-trimethyl-2-norbornene;
santene; 1,2,3-trimethyl-2-norbornene; isocamphodiene; camphenilene; isofenchene and
2,5,5-trimethyl-2-norbornene.

17. The process of Claim 10, wherein the at least one is selected from the group
consisting of d-limonene, terpinolene, α -terpinene; γ -terpinene, myrcene, 3-carene, sabinene,
 α -pinene and camphene and the at least one silicone is selected from the group of silicones
having viscosities less than 10.0 cSt.

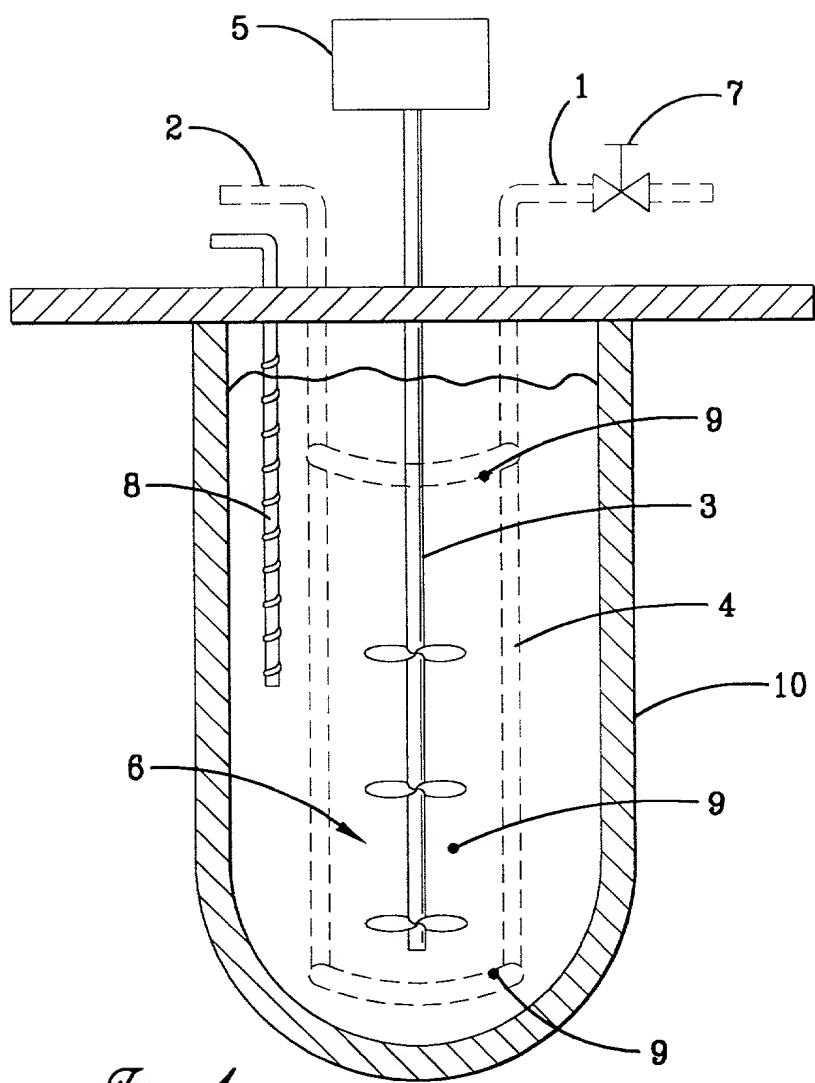


Fig. 1

FREEZING AND MELTING CURVE FOR 95.6% d-LIMONENE

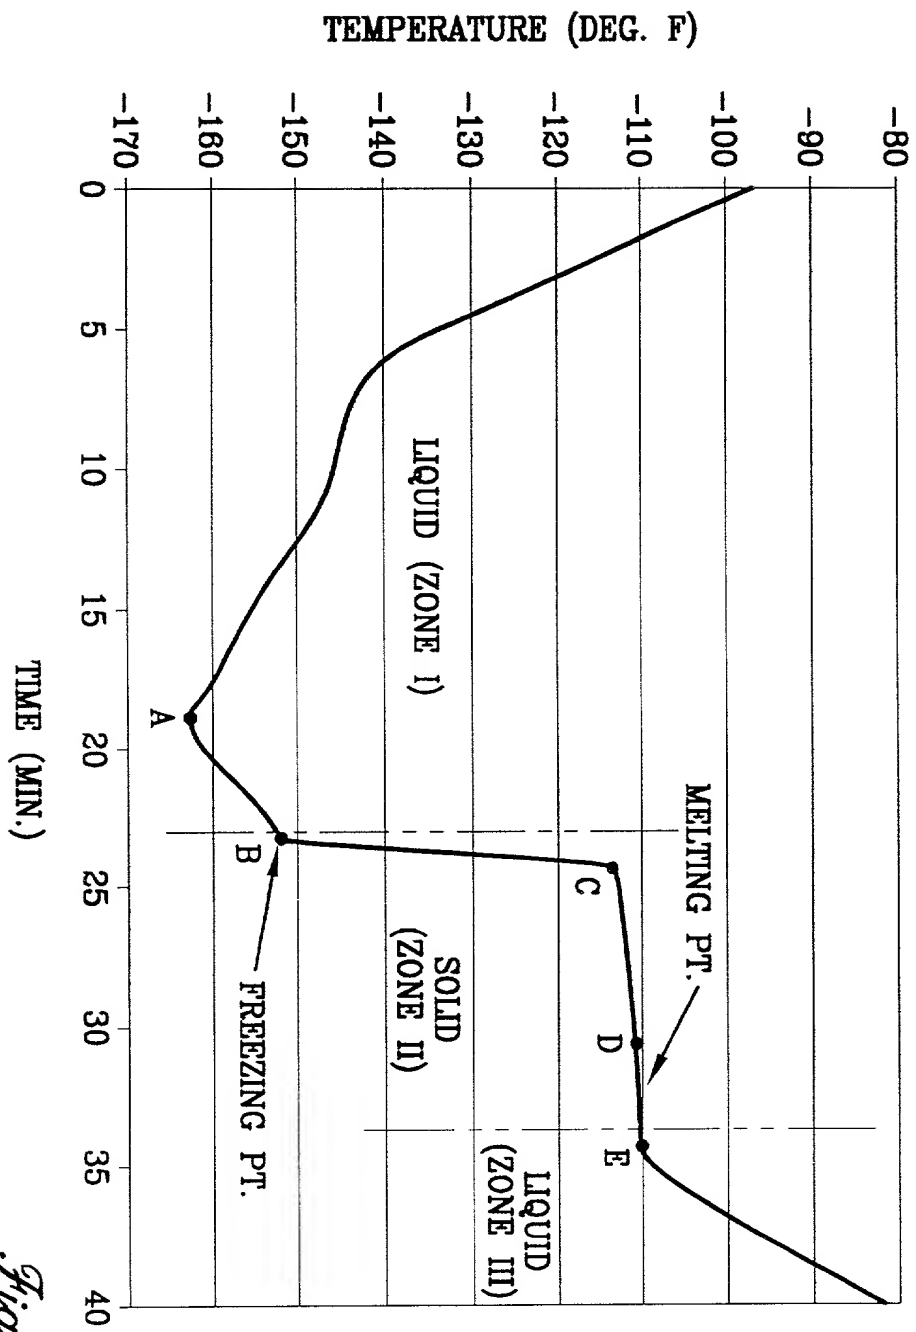


Fig. 2

006643203 074000

1



Fig. 3

Freezing/melting curves for d-limonene and d-limonene/silicone (1:1) mixture

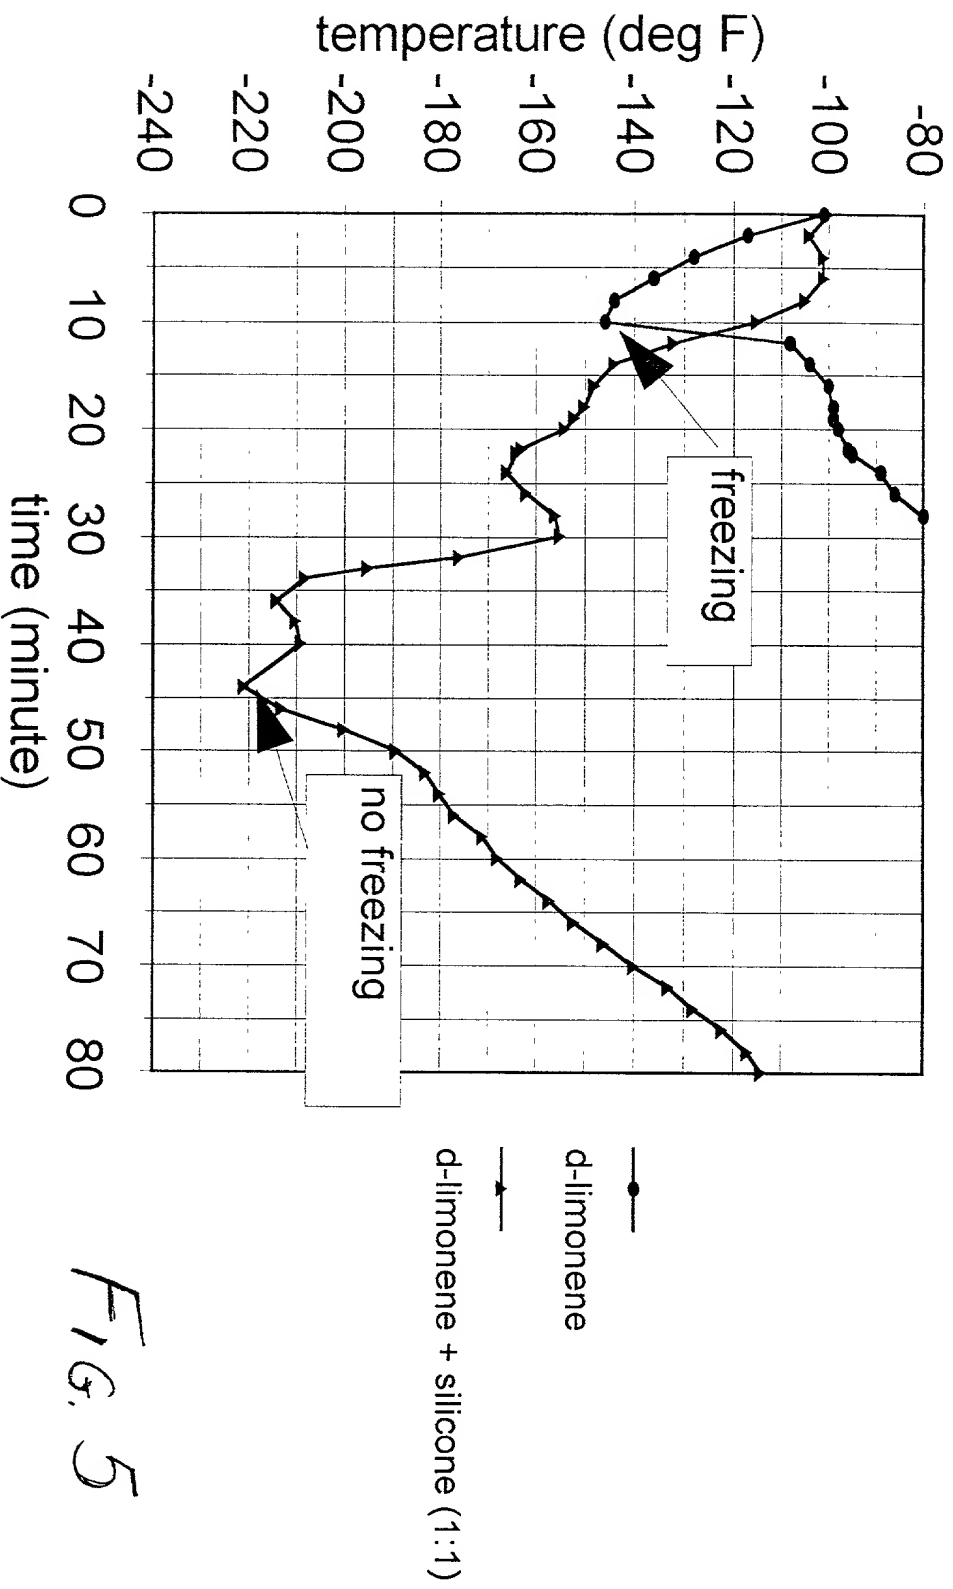


FIG. 5

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

HEAT TRANSFER FLUID COMPOSITIONS FOR LOW TEMPERATURE APPLICATIONS

the specification of which (check one)

- ☒ is attached hereto.
☐ was filed on _____ as Application Serial No. _____ and
was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims as amended by any amendment referred to above

I acknowledge the duty to disclose information which is material to the patentability of one or more existing claims when such information is not cumulative to information already of record, or being made of record, during the examination of this application in accordance with Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Sec 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Priority Foreign Application(s)

(Number) (Country) (Day/Month/Year filed)

Priority Claimed
Yes ☐ No ☐

(Number) (Country) (Day/Month/Year filed)

Yes ☐ No ☐

(Number) (Country) (Day/Month/Year filed)

Yes ☐ No ☐

I hereby claim the benefit under Title 35, United States Code, Sec 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Sec. 112, I acknowledge the duty to disclose

material information as defined in Title 37, Code of Federal Regulations, Sec. 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

08/674,348	07/02/1996	PENDING
(Application Serial No.)	(Filing Date)	(Status - patented, pending, abandoned)

(Application Serial No.)	(Filing Date)	(Status - patented, pending, abandoned)
--------------------------	---------------	---

And I hereby appoint Sanford J. Piltch, Registration No. 29,997, as my attorney or agent with full power of substitution and revocation, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

Please address all correspondence with respect to this application to:

Sanford J. Piltch, Esq.
The Atrium - Suite 204
2895 Hamilton Boulevard
Allentown, PA 18104

Please direct all telephone calls to Sanford J. Piltch at 610-433-6266 and telecopier facsimile transmissions at 610-820-9566.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

FULL NAME OF SOLE OR FIRST INVENTOR: **James T. Hsu**

INVENTOR'S SIGNATURE James T. Hsu

DATE: **July 10, 2000** CITIZENSHIP: **U.S.A.**

RESIDENCE: **3101 Kenwick Circle, Bethlehem, PA 18018**

POST OFFICE ADDRESS: (same as above)

FULL NAME OF SECOND INVENTOR: **Satish Mohapatra**

INVENTOR'S SIGNATURE S. Mohapatra

DATE: **July 10, 2000** CITIZENSHIP: **INDIA**

RESIDENCE: **422 Pierce Street, 2nd Floor, Bethlehem, PA 18015**

POST OFFICE ADDRESS: (same as above)

FOR: Daniel J. Loikits

[Signature]

CITIZENSHIP: **U.S.A.**

Northampton, PA 18067

same as above)

[illegible]